


Control Handles - EP Meter (Electronic Preset Meter)

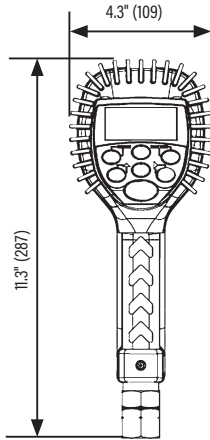

Fluids

- Anti-freeze (Glycol)
- Windshield wash solution
- Water

Markets Served

- Car and truck dealers
- Fast lube and maintenance shops
- Fleets

Overview

- Reinforced polyamide body and stainless Steel valve mechanism.
- Ergonomic-grip.
- Includes Brass inlet swivel 1/2" NPT(F), flex-90 extension and a 1/4 turn manual tip.

MODELS AVAILABLE	DESCRIPTION
<input type="checkbox"/> 3331-028	Bare
<input type="checkbox"/> 3331-029	Rigid Hi-Flow
<input type="checkbox"/> 3331-030	Flex Hi-Flow

TECHNICAL DATA

Units of measure	Quarts, pints, gallons, liters
Accuracy	+/- 0.5 %
Flow Rate	0.25-10 gal/m (1-38 l/m)
Maximum pressure	1,000 psi (70 bar)
Swivel Inlet	1/2" NPT(F)
Battery	4 x alkaline "AA"
Weight	5.5 lb (2.5 kg)
Compatible Fluids	Oil, transmission fluid, hydraulic fluid, and anti-freeze
Wetted Materials	Acetal, stainless steel, Buna-N™, brass, polyurethane
Service Bulletin	SB 3109