


CF10 Poly AODD Pump-CenterFlo

Pumps
AODD

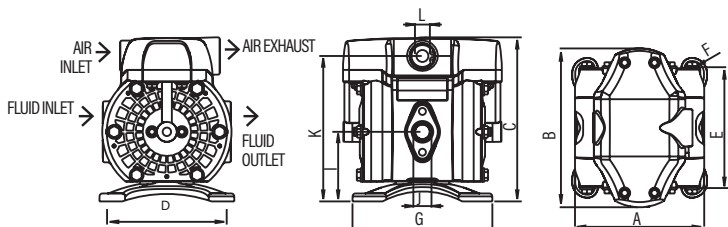

| DIMENSIONS INCHES | | | | | | | | | | |
|-------------------|------|------|------|------|------|------|------|---------|------|---------|
| A | B | C | D | E | F* | G | I | J | K | L |
| 5.12 | 6.30 | 6.50 | 4.13 | 4.80 | 0.31 | 5.54 | 2.76 | 1/2"(F) | 5.75 | 3/8"(F) |

* Diameter of the holes for fasteners in each of the four pump feet.
Flange connection: 2 bolts - M 5 (1.61" between centers)

Fluids

- Anti-freeze (Glycol)
- Windshield wash solution
- DEF

Markets Served

- Car and truck dealers
- Tire shops
- In-plant transfer
- Quick lubes

Overview


CenterFlo pumps can handle a wide range of fluids used for vehicle service.

Typical applications are transferring, dispensing, and evacuation, up to 10 gal/min. They can be used as stand-alone pumps for transfer applications.

| MODELS AVAILABLE | DESCRIPTION |
|---|--------------------------|
| <input type="checkbox"/> 1120-029A | CF10 Polypropylene |
| <input type="checkbox"/> 1120-034 | CF10 Polypropylene / DEF |

| TECHNICAL DATA | |
|--------------------------|--|
| Air inlet | 3/8" NPSM(F) |
| Fluid inlet port | 1/2" NPT(F) 1120-029A 1/2" BSPP(F) for DEF 1120-034 |
| Fluid outlet port | 1/2" NPT(F) 1120-029A 1/2" BSPP(F) for DEF 1120-034 |
| Max. free flow | 10 gal/min (38 l/min) |
| Air pressure range | 22 to 102 psi (1.5 to 7 bar) |
| Solids in suspension | 1/8" (3 mm) |
| Wetted Materials | PTFE (Teflon), Viton®, polypropylene, stainless steel, acetal, and Hytrel® |
| Recommended Fluids | Anti-freeze (Glycol) and windshield wash solution |
| Recommended Applications | Fluid dispensing, transfer, DEF, and evacuation |
| Service Bulletin | SB 1121 |

** Balcrank does not recommend pumping windshield wash or any other fluid below 100° flash point. Contact Balcrank for additional information.

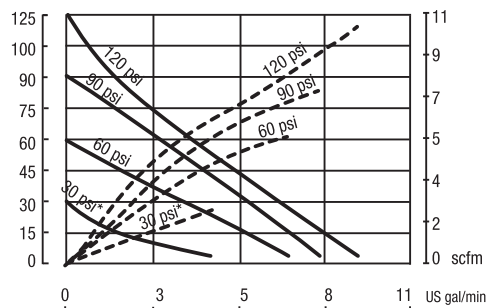

FLUID PRESSURE psi
 — Outlet pressure
 - - - Air consumption

(*) 2 bar test with a PTFE (Teflon) diaphragms pump.