

CF65 AODD Pump-CenterFlo


Pumps
AODD



Overview

CenterFlo pumps can handle a wide range of fluids used for vehicle service.

Typical applications are high volume transferring, bulk fill, and evacuation up to 65 gal/min. They can be used as stand-alone pumps for transfer applications or as systems pumps that include hose reels.

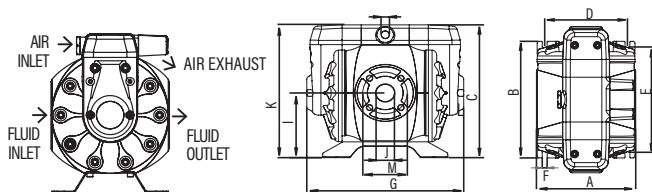

DIMENSIONS INCHES

A	B	C	D	E	F*	G	I	J	K	L	M
10.39"	12.20"	13.90"	8.66"	11.02"	0.51"	15.35"	6.77"	1.5" (F)	12.87"	0.5" (F)	4.33**

* Diameter of the holes for fasteners in each of the four pump feet.

** ANSI B16.5 150 lb flange connection: 4 bolts - UNC 1/2" - 13 (3.87" between centers)

MODELS AVAILABLE	DESCRIPTION
<input type="checkbox"/> 1120-033	CF65 Diaphragm Pump
<input type="checkbox"/> 1120-039	CF65 Diaphragm Pump Buna-N™

TECHNICAL DATA

Air inlet	1/2" NPSM(F)
Fluid inlet port	1 1/2" NPT(F) + ANSI flange B16.5 150 lb
Fluid outlet port	1 1/2" NPT(F) + ANSI flange B16.5 150 lb
Max. free flow	65 gal/min (250 l/mn)
Air pressure range	22-102 psi (1.5-7 bar)
Solids in suspension	1/4" (6 mm)
Wetted Materials	Aluminum, acetal, Buna-N™, stainless steel
Recommended fluids	Anti-freeze (Glycol)
Recommended applications	Fluid dispensing, transfer, and evacuation
Service Bulletin	SB 1132


Fluids

- Anti-freeze (Glycol)
- Light viscosity fluids
- Windshield wash solution
- Synthetic and mineral oil
- Used oil and anti-freeze

Markets Served

- Car and truck dealers
- Fleets
- Mining and construction
- Railroad and mass transit vehicles
- In-plant
- Lube trucks

** Balcrank does not recommend pumping windshield wash or any other fluid below 100° flash point. Contact Balcrank for additional information.

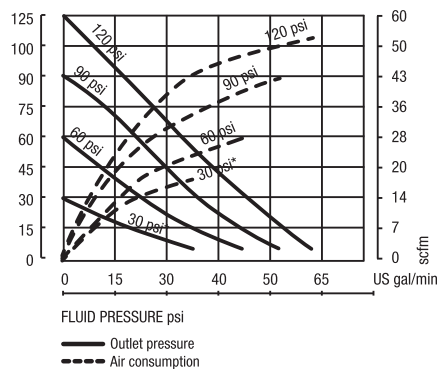

(*) 2 bar test with a Hytrel diaphragms pump.