


Control Handles - Non-Metered



Dimensions inches (mm)

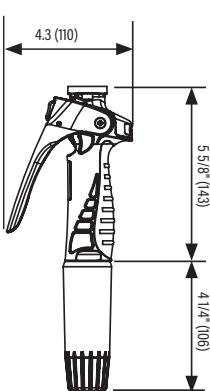

833398 MULTI COLORED SET; RED, YELLOW, GREEN, BLUE (4 PCS)

833398RD RED - 1 EACH

833398YL YELLOW - 1 EACH

833398BL BLUE - 1 EACH

833398GR GREEN - 1 EACH

833398BK BLACK - 1 EACH

Fluids

- Synthetic and mineral based lubricants
- Gear Oil
- Hydraulic oil and fluids
- ATF
- Anti-freeze (glycol) and anti-freeze water solution

Markets Served

- Car and truck dealers
- Fast lube and maintenance shops
- Fleets
- Mining and construction
- Lube trucks
- Railroad and mass transit

Overview

- Fully ported, ball bearing, inlet swivel included.
- Easy access fluid inlet screen included at swivel.
- Included swivel hose-end cover, protects vehicle or machine surfaces from scratches.
- Easy access for service of the rotary piston mechanism.
- Trigger lock button prevents accidental control valve opening and allows the control valve to be locked in open position for large volumes dispense.
- Cam & piston valve design optimized for superb control and minimal flow resistance.
- Ergonomically designed grip handle for optimum comfort.

MODELS AVAILABLE	EXTENSION TYPE & NOZZLE	EXTENSION CODE
Verify ID of ATF fill port for compatibility.		
<input type="checkbox"/> 3320-026	Flex Auto	3332-095
<input type="checkbox"/> 3320-022	Rigid 1/4 turn - OIL	3332-091
<input type="checkbox"/> 3320-023	Flex 90 1/4 turn - OIL	3332-092
<input type="checkbox"/> 3320-024	Flex Memory 1/4 turn - OIL	3332-093
<input type="checkbox"/> 3320-032	Flex Memory 1/4 turn - ATF	3332-104
<input type="checkbox"/> 3320-056	Bare	-

TECHNICAL DATA

Flow Rate	0.26-10.5 gal/min (1-40 l/min)
Maximum pressure	1,450 psi (100 bar)
Swivel Inlet	1/2" NPT(F) Swivel
Dispense Nozzle OD	Auto = 0.605" Manual 1/4 turn for OIL = 0.705" Manual 1/4 turn for ATF = 0.315" Verify ID of ATF fill port for compatibility
Operating Temperature	14 °F to 140 °F (-10 °C to 60 °C)
Weight	3.30 lb (1.5 kg)
Compatible Fluids	Oil, transmission fluid, hydraulic fluid, and anti-freeze
Wetted Materials	Aluminum, stainless steel, zinc alloy, Buna-N™, zinc plated steel and brass
Service Bulletin	SB 3095