


## Control Handles Non-Metered



### TECHNICAL DATA

Flow Rate	0.26-10.5 gal/min (1-40 l/min)
Maximum pressure	1,450 psi (100 bar)
Swivel Inlet	1/2" NPT(F) Swivel
Dispense Nozzle OD	Auto = 0.605" Manual 1/4 turn for OIL = 0.705" Manual 1/4 turn for ATF = 0.315" Verify ID of ATF fill port for compatibility
Operating Temperature	14° F to 140° F (-10° C to 60° C)
Weight	3.30 lb (1.5 kg)
Compatible Fluids	Oil, transmission fluid, hydraulic fluid, and anti-freeze
Wetted Materials	Aluminum, stainless steel, zinc alloy, Buna-N™, zinc plated steel and brass
Service Bulletin	SB 3095

Dimensions inches (mm)

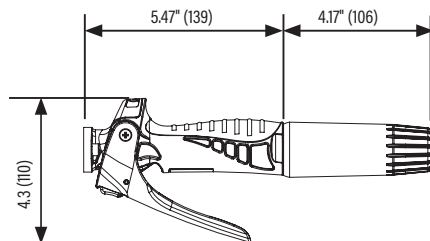

833398 Multi Colored set; red, yellow, green, blue (4 pcs)



**Synthetic and mineral  
based lubricants  
Gear Oil  
Hydraulic oil and fluids  
ATF  
Anti-freeze (Glycol)  
and anti-freeze water  
solution**

- Fully ported, ball bearing, inlet swivel included
- Easy access fluid inlet screen included at swivel
- Included swivel hose-end cover, protects vehicle or machine surfaces from scratches
- Easy access for service of the rotary piston mechanism
- Trigger lock button prevents accidental control valve opening and allows the control valve to be locked in open position for large volumes dispense
- Cam & piston valve design optimized for superb control and minimal flow resistance
- Ergonomically designed grip handle for optimum comfort

### Markets Served

- Car and truck dealers
- Fast lube and maintenance shops
- Fleets
- Mining and construction
- Lube trucks
- Railroad and mass transit

MODELS AVAILABLE	EXTENSION TYPE & NOZZLE	EXTENSION CODE
Verify ID of ATF fill port for compatibility.		
<b>3320-026</b>	Flex Auto	3332-095
<b>3320-022</b>	Rigid 1/4 turn - OIL	3332-091
<b>3320-023</b>	Flex 90 1/4 turn - OIL	3332-092
<b>3320-024</b>	Flex Memory 1/4 turn - OIL	3332-093
<b>3320-032</b>	Flex Memory 1/4 turn - ATF	3332-104
<b>3320-056</b>	Bare	-