

Lightweight Double Wall AODD Packages

Anti-freeze & Windshield Wash Fluid




Package includes*

- Double wall tank - choice of 165 gal (L 29" x W 28" x H 61") or 275 gal (L 43" x W 28" x H 61")
- CenterFlo polypropylene AODD pump CF30
- Pump bracket
- F/R auto drain 1/4" NPT(F)
- Tank sight gauge
- Vented 2" evac cap/port
- Air supply hose with quick coupler
- Hose reel - choice of Evolution hose reels 30' or 50'
- Shipped completely assembled and ready for use (See additional accessories on pg. 152)

*Control handle not included. Select the appropriate control handle based on the material being dispensed, anti-freeze or windshield wash fluids.

Lightweight Double Wall Package Used Fluid

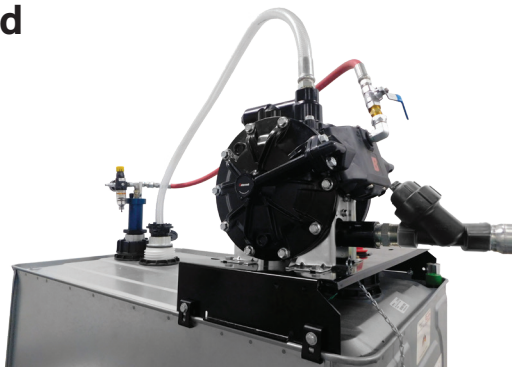

Package includes

- Double wall tank - choice of 275 gal (L 43" x W 28" x H 61") or 400 gal (L 64" x W 30" x H 68")
- CenterFlo aluminum AODD pump CF50
- Pump bracket
- F/R auto drain 1/4" NPT(F)
- Y-strainer on used oil models
- 1" evacuation hose with 1" cam-lock for used oil (3/4" for anti-freeze)
- High level pump shut-off
- Tank site gauge
- Vented 2" evac cap/port
- Air supply hose with quick coupler
- Shipped completely assembled and ready for use

*As with all tanks, be sure to follow local and state guidelines for tank placement and installation. Some cities and counties have not approved the UL 2258 certification, as it is different that the familiar UL142 that pertains to steel tanks, so be sure to check with your local Fire Marshal and/or city and county regulations before ordering.

Features

Our lightweight double wall used oil and anti-freeze evacuation packages come completely assembled and ready for use; simply connect the pump air supply hose and fill with oil.

The **A/F and WW packages** include a 1" poly AODD pump, hose reel and all hoses and fittings.

The **used fluid packages** include a high-level pump shut-off, site gauge, Y-strainer and a 1" cam-lock connector. The used anti-freeze packages come with a 3/4" cam lock to prevent accidental contamination of fluids.

Select your control handle separately (pg. 108) based on the fluid you are dispensing

MODELS AVAILABLE	DESCRIPTION
ANTI-FREEZE & WINDSHIELD WASH FLUID	
1135-038	CF30 Polypropylene, 165 gal, EVO 50; A/F & WWS
1135-039	CF30 Polypropylene, 275 gal, EVO 30; A/F & WWS
1135-040	CF50 Polypropylene, 275 gal, EVO 50; A/F & WWS
1135-038T	Tankless CF30 Polypropylene, 165 gal, EVO 50; A/F & WWS
1135-039T	Tankless CF30 Polypropylene, 275 gal, EVO 30; A/F & WWS
1135-040T	Tankless CF50 Polypropylene, 275 gal, EVO 50; A/F & WWS
USED FLUID	
4140-072	CF50, 400 gal, EVAC for oil
4140-071	CF50, 275 gal, EVAC for oil
4140-068	CF50, 400 gal, EVAC for A/F
4140-069	CF50, 275 gal, EVAC for A/F

5