


Control Handles Non-Metered



TECHNICAL DATA

| | |
|-----------------------|---|
| Flow Rate | 0.26-10.5 gal/min (1-40 l/min) |
| Maximum pressure | 1,450 psi (100 bar) |
| Swivel Inlet | 1/2" NPT(F) Swivel |
| Dispense Nozzle OD | Auto = 0.605" Manual 1/4 turn for OIL = 0.705" Manual 1/4 turn for ATF = 0.315" Verify ID of ATF fill port for compatibility |
| Operating Temperature | 14 °F to 140 °F (-10 °C to 60 °C) |
| Weight | 3.30 lb (1.5 kg) |
| Compatible Fluids | Oil, transmission fluid, hydraulic fluid, and anti-freeze |
| Wetted Materials | Aluminum, stainless steel, zinc alloy, Buna-N™, zinc plated steel and brass |
| Service Bulletin | SB 3095 |

Dimensions inches (mm)

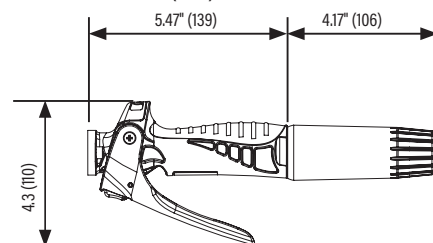

833398 Multi Colored set; red, yellow, green, blue (4 pcs)

Features

- Fully ported, ball bearing, inlet swivel included
- Easy access fluid inlet screen included at swivel
- Included swivel hose-end cover, protects vehicle or machine surfaces from scratches
- Easy access for service of the rotary piston mechanism
- Trigger lock button prevents accidental control valve opening and allows the control valve to be locked in open position for large volumes dispense
- Cam & piston valve design optimized for superb control and minimal flow resistance
- Ergonomically designed grip handle for optimum comfort

Fluids

- Synthetic and mineral based lubricants
- Gear Oil
- Hydraulic oil and fluids
- ATF
- Anti-freeze (Glycol) and anti-freeze water solution

Markets Served

- Car and truck dealers
- Fast lube and maintenance shops
- Fleets
- Mining and construction
- Lube trucks
- Railroad and mass transit

| MODELS AVAILABLE | EXTENSION TYPE & NOZZLE | EXTENSION CODE |
|---|----------------------------|----------------|
| Verify ID of ATF fill port for compatibility. | | |
| 3320-026 | Flex Auto | 3332-095 |
| 3320-022 | Rigid 1/4 turn - OIL | 3332-091 |
| 3320-023 | Flex 90 1/4 turn - OIL | 3332-092 |
| 3320-024 | Flex Memory 1/4 turn - OIL | 3332-093 |
| 3320-032 | Flex Memory 1/4 turn - ATF | 3332-104 |
| 3320-056 | Bare | - |