

Electronic Preset Meter

Balcrank
Fluid Dispensing Systems

Preset dispensing allows hands-free operation as the meter automatically shuts off once the desired preset amount is reached.

- Programmable for quarts, pints, gallons, liters
- Save up to 10 preset values in the built-in memory
- Operates in manual or automatic preset mode
- Transaction memory: stores the volume delivered of the last 5 transactions
- Low battery indicator

Fluids

- Motor oil
- Hydraulic oil
- Gear oil
- ATF

Applications

- Car and truck dealerships
- Truck fast lube and maintenance shops
- Fleets
- Mining and construction
- Railroad and mass transit



3331-033



3331-032




ORDER INFORMATION

MODELS AVAILABLE	DESCRIPTION
3331-031	Rigid 1/4 turn - OIL
3331-032	Flex 90 1/4 turn - OIL
3331-033	DR bare

TECHNICAL DATA

Units of measure	Quarts, pints, gallons, liters
Accuracy	+/- 0.5%
Flow range	0.25-7.5 gal/m (1-30 l/m)
Maximum pressure	1,425 psi (100 bar)
Swivel inlet	1/2" NPT(F)
Battery	4 x alkaline "AA"
Weight	3.7 lb (1.7 kg)
Compatible fluids	Oil, transmission fluid, hydraulic fluid, anti-freeze and gear oil
Wetted Materials	Aluminum, AIS316 stainless steel, Buna-N, Delrin, brass, and zinc plated steel
Service Bulletins	SB 3115

Dimensions inches (mm)

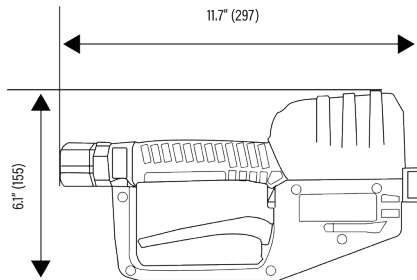

Balcrank Corporation

90 Monticello Road
Weaverville, NC 28787, USA
Tel.: (800) 747-5300

info@balcrank.com
www.balcrank.com
www.shopbalcrank.com