


Control Handles Non-Metered

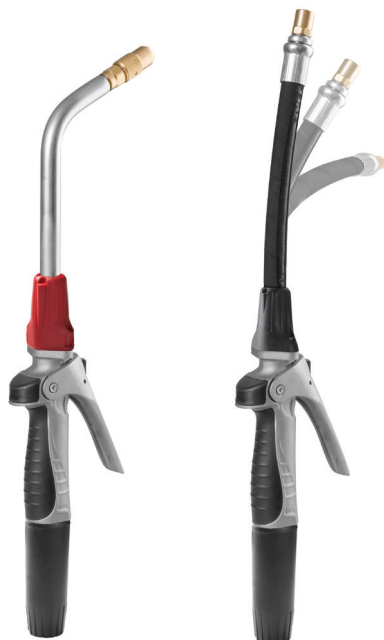

**Synthetic and mineral
based lubricants
Gear Oil
Hydraulic oil and fluids
ATF
Anti-freeze (Glycol)
and anti-freeze water
solution**

- Fully ported, ball bearing, inlet swivel included
- Easy access fluid inlet screen included at swivel
- Included swivel hose-end cover, protects vehicle or machine surfaces from scratches
- Easy access for service of the rotary piston mechanism
- Trigger lock button prevents accidental control valve opening and allows the control valve to be locked in open position for large volumes dispense
- Cam & piston valve design optimized for superb control and minimal flow resistance
- Ergonomically designed grip handle for optimum comfort

Markets Served


- Car and truck dealers
- Fast lube and maintenance shops
- Fleets
- Mining and construction
- Lube trucks
- Railroad and mass transit

TECHNICAL DATA

Flow Rate	0.26-10.5 gal/min (1-40 l/min)
Maximum pressure	1,450 psi (100 bar)
Swivel Inlet	1/2" NPT(F) Swivel
Dispense Nozzle OD	Auto = 0.605" Manual 1/4 turn for OIL = 0.705" Manual 1/4 turn for ATF = 0.315" Verify ID of ATF fill port for compatibility
Operating Temperature	14° F to 140° F (-10° C to 60° C)
Weight	3.30 lb (1.5 kg)
Compatible Fluids	Oil, transmission fluid, hydraulic fluid, and anti-freeze
Wetted Materials	Aluminum, stainless steel, zinc alloy, Buna-N™, zinc plated steel and brass
Service Bulletin	SB 3095

MODELS AVAILABLE	EXTENSION TYPE & NOZZLE	EXTENSION CODE
Verify ID of ATF fill port for compatibility.		
3320-026	Flex Auto	3332-095
3320-022	Rigid 1/4 turn - OIL	3332-091
3320-023	Flex 90 1/4 turn - OIL	3332-092
3320-024	Flex Memory 1/4 turn - OIL	3332-093
3320-032	Flex Memory 1/4 turn - ATF	3332-104
3320-056	Bare	-

Dimensions inches (mm)

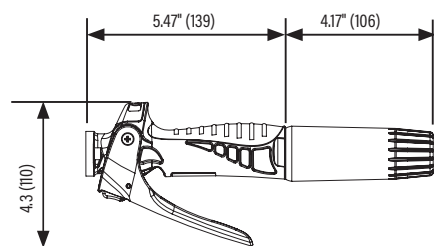

833398 Multi Colored set; red, yellow, green, blue (4 pcs)