


# Grease Piston Pumps

## Lion™ 450 25:1 Pump

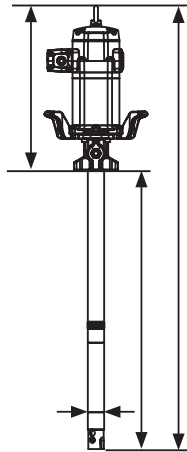

Dimensions inches (MM)			
A	B	C	D
53.25" (1,357 mm)	19.75" (502 mm)	2" (50 mm)	33.5" (855 mm)

## Grease up to NLGI-2 High Viscosity Oil

This medium pressure double ball pump can be used for both grease and oil in high volume medium pressure bulk transfer applications. The construction of the pump allows for dual use for grease systems that don't require high pressure or a high volume medium pressure oil system.

### Applications

- Lube trucks bulk transfer
- Mining and construction; grease and oil transfer
- In-plant supply/maintenance

TECHNICAL DATA	
Pump ratio	25:1
Continuous duty flow rate	13 lb/min (6 kg/min)
Cycles per lb	6
Maximum free flow	35 lb/min (16 kg/min)
Operating air pressure	30 - 200 psi (1.38 - 14 bar)
Maximum fluid stall pressure	5,000 psi (350 bar)
Air motor effective diameter	4.5" (115 mm)
Air motor stroke	4" (100 mm)
Air consumption <sup>(1)</sup>	47 CFM (1,340 NI/min)
Air inlet	1/2" NPT(F)
Fluid outlet	1/2" NPT(F)
Wetted materials	Cast Iron, Steel, Hard Chromed Steel, UHMWPE, and Buna-N™
Noise level <sup>(2)</sup>	80 dB
Service bulletin	SB 1139

1) Maximum air consumption with 5 bar air inlet pressure and 80 cpm.

(2) Maximum noise level measured at 1 m from the pump, 7 bar air pressure and free delivery.

**Warning!** Do not use any Lion™ 450/600 series products with flammable fluids.

Verify fluid compatibility with MSDS sheets.

Contact Balcrank for pumping grease higher than NLGI-2 and specific system design performance technical data.

MODELS AVAILABLE	DESCRIPTION
<b>1450-001</b>	Lion™ 450 25:1 grease 400 lb drum pump

### TEST FLUID: NLGI-0

