


Control Handles - MO Series Metered Control Handle



Dimensions inches (mm)

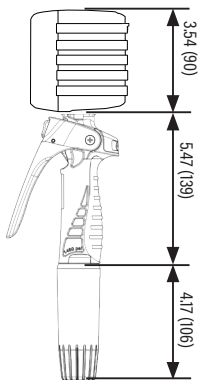

833398 MULTI COLORED SET; RED, YELLOW, GREEN, BLUE (4 PCS)

Control Handles

Overview

- 6-digit totalizer; keeps lifetime record of volume dispensed in gallons
- Meter with odometer display, works without batteries and performs well in all environments
- No calibration required; precision machined metering chamber assures repeatable accuracy
- Ergonomically designed grip handle for optimum comfort
- Unique 1/4 turn manual non-drip tip; fast, simple
- Included swivel hose-end cover, protects vehicle or machine surfaces from scratches

MODELS AVAILABLE	EXTENSION TYPE & NOZZLE	EXTENSION CODE U/M	
Verify ID of ATF fill port for compatibility.			
<input type="checkbox"/> 3330-205	Flex-memory 1/4 turn - OIL	3332-093	QT
<input type="checkbox"/> 3330-206	Flex 90 1/4 turn - ATF	3332-104	QT
<input type="checkbox"/> 3330-207	Rigid 1/4 turn - OIL	3332-091	QT
<input type="checkbox"/> 3330-208	Flex 90 1/4 turn - OIL	3332-092	QT
<input type="checkbox"/> 3330-212	Flex-memory 1/4 turn - OIL	3332-093	L
<input type="checkbox"/> 3330-213	Flex 90 1/4 turn - ATF	3332-104	L
<input type="checkbox"/> 3330-214	Rigid 1/4 turn - OIL	3332-091	L
<input type="checkbox"/> 3330-215	Flex 90 1/4 turn - OIL	3332-092	L
<input type="checkbox"/> 3330-204	Bare	-	QT
<input type="checkbox"/> 3330-211	Bare	-	L

Fluids

- Synthetic and mineral based lubricants
- Gear Oil
- Hydraulic oil and fluids
- ATF
- Anti-freeze (glycol) and anti-freeze water solution

Markets Served

- Car and truck dealers
- Fast lube and maintenance shops
- Fleets
- Mining and construction
- Lube trucks

TECHNICAL DATA

Units of measure	Quarts & Liters (totalizer Gallons)
Accuracy	+/- 1%
Flow Rate	0.25 - 8 gal/min (1 - 30 l/min)
Maximum pressure	1,000 psi (70 bar)
Swivel inlet	1/2" NPT(F)
Dispense Nozzle OD	Auto = 0.605" Manual 1/4 turn for OIL = 0.705" Manual 1/4 turn for ATF= 0.315" Verify ID of ATF fill port for compatibility
Operating temperature	14 °F to 140 °F (-10 °C to 60 °C)
Weight	4 lb (1.80 kg)
Compatible Fluids	Oil, transmission fluid, hydraulic fluid, and anti-freeze
Wetted Materials	Acetal, aluminum, stainless steel, Buna-N™, Zinc plated steel, TPU, Polyamide
Service Bulletin	SB 3113