


Control Handles - HighFlo

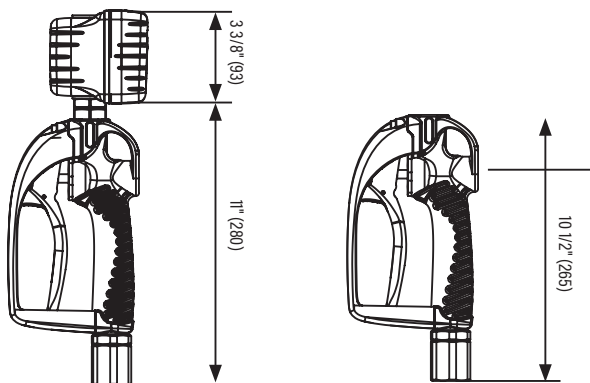

Dimensions inches (mm)

Fluids

- Synthetic and mineral based lubricants
- Gear Oil
- Hydraulic oil and fluids
- ATF
- Anti-freeze (Glycol)

Markets Served

- Truck dealers
- Fleets
- Mining and construction
- Lube trucks
- Railroad and mass transit

Overview

- HighFlo Control Handle is designed for service where higher volume deliveries are required.
- High volume rigid or flexible outlets with non-drip tip.
- 3/4" or 1" NPT inlet connection thread
- Ideal for bulk fill, transfer and high flow dispense.
- Heavy duty rugged design.

MODELS AVAILABLE	DESCRIPTION
<input type="checkbox"/> 3330-197	Rigid - Metered, 3/4" NPT(F) Inlet
<input type="checkbox"/> 3330-198	Flex - Metered, 3/4" NPT(F) Inlet
<input type="checkbox"/> 3330-199	Rigid - Metered, 1" NPT(F) Inlet
<input type="checkbox"/> 3330-200	Flex - Metered, 1" NPT(F) Inlet
<input type="checkbox"/> 3320-051	Rigid - Non-Metered, 3/4" NPT(F) Inlet
<input type="checkbox"/> 3320-052	Flex - Non-Metered, 3/4" NPT(F) Inlet
<input type="checkbox"/> 3320-053	Rigid - Non-Metered, 1" NPT(F) Inlet
<input type="checkbox"/> 3320-054	Flex - Non-Metered, 1" NPT(F) Inlet

TECHNICAL DATA		
	NON-METERED	METERED
Units of measure	-	Batch: Liters, quarts, pints, gallons
Accuracy	-	+/-0.5% of reading
Flow Range	0.26-24 gal/min (1-90 l/min)	0.52-19 gal/min (2-70 l/min)
Maximum pressure	1,450 psi (100 bar)	
Swivel inlet:	3/4" or 1" NPT(F)	
Operating Temperature	14 to 140 °F (-10 to 60 °C)	
Weight	4.5 lb (2.05 kg)	6.3 lb (2.85 kg)
Compatible Fluids	Oil, transmission fluid, hydraulic fluid, and anti-freeze	
Wetted Materials	Aluminum, Buna-N™, zinc plated steel and brass	Acetal, aluminum, stainless steel, Buna-N™, zinc plated steel and brass
Service Bulletin	SB 3097	SB 3097 + SB 3098