


Control Handles MO Meter (Mechanical Oval Gear Meter)



See Dispense nozzle OD for important details

| TECHNICAL DATA | |
|-----------------------|--|
| Units of measure | Quarts & Liters (totalizer Gallons) |
| Accuracy | +/- 1% |
| Flow Rate | 0.25 - 8 gal/min (1 - 30 l/min) |
| Maximum pressure | 1,000 psi (70 bar) |
| Swivel inlet | 1/2" NPT(F) |
| Dispense Nozzle OD | Auto = 0.605" Manual 1/4 turn for OIL = 0.705" Manual 1/4 turn for ATF= 0.315" Verify ID of ATF fill port for compatibility |
| Operating temperature | 14 °F to 140 °F (-10 °C to 60 °C) |
| Weight | 4 lb (1.80 kg) |
| Compatible Fluids | Oil, transmission fluid, hydraulic fluid, and anti-freeze |
| Wetted Materials | Acetal, aluminum, stainless steel, NBR, Zinc plated steel, TPU, Polyamide |
| Service Bulletin | SB 3113 |

Dimensions inches (mm)

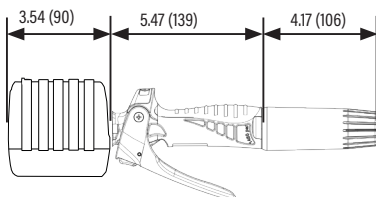

833398 Multi Colored set; red, yellow, green, blue (4 pcs)



Features

- 6-digit totalizer; keeps lifetime record of volume dispensed in gallons
- Meter with odometer display, works without batteries and performs well in all environments
- No calibration required; precision machined metering chamber assures repeatable accuracy
- Ergonomically designed grip handle for optimum comfort
- Unique 1/4 turn manual non-drip tip; fast, simple
- Included swivel hose-end cover, protects vehicle or machine surfaces from scratches

Fluids

- Synthetic and mineral based lubricants
- Gear Oil
- Hydraulic oil and fluids
- ATF
- Anti-freeze (Glycol) and anti-freeze water solution

Markets Served

- Car and truck dealers
- Fast lube and maintenance shops
- Fleets
- Mining and construction
- Lube trucks

| MODELS AVAILABLE | EXTENSION TYPE & NOZZLE | EXTENSION CODE U/M | |
|---|----------------------------|--------------------|----|
| Verify ID of ATF fill port for compatibility. | | | |
| 3330-205 | Flex-memory 1/4 turn - OIL | 3332-093 | QT |
| 3330-206 | Flex-memory 1/4 turn - ATF | 3332-104 | QT |
| 3330-207 | Rigid 1/4 turn - OIL | 3332-091 | QT |
| 3330-208 | Flex 90 1/4 turn - OIL | 3332-092 | QT |
| 3330-212 | Flex-memory 1/4 turn - OIL | 3332-093 | L |
| 3330-213 | Flex 90 1/4 turn - ATF | 3332-104 | L |
| 3330-214 | Rigid 1/4 turn - OIL | 3332-091 | L |
| 3330-215 | Flex-memory 1/4 turn - OIL | 3332-092 | L |
| 3330-204 | Bare | - | QT |
| 3330-211 | Bare | - | L |

3