

Hose Reels

Extended Volume+ (EVX+)

Air & Water Anti-freeze Diesel


The Extended Volume+, EVX+ Series hose reel is designed for extreme heavy-duty applications where large hose diameters are required for increased flow. The dual spring EVX+ reel will accommodate up to 50' of 1 1/2" ID hose. Perfect for heavy-duty fleet, construction, mining and industrial applications.

Hose not included



| MODELS AVAILABLE | DESCRIPTION | REPLACEMENT HOSE |
|---|--------------------------------|------------------|
| Air, Water, Diesel & Low Pressure Oil Transfer 580 psi (21 bar) for delivery of air, water, diesel & oil transfer | | |
| 2310-047 | Bare reel - up to 50' x 1 1/2" | - |
| 2310-029 | Bare reel - up to 75' x 1 1/2" | - |

| TECHNICAL DATA | |
|----------------------------|--|
| Diesel, Low Pressure Reels | |
| Fluid inlet port | 1 1/2" NPT(F) swivel |
| Fluid outlet port | 1 1/2" NPT(F) swivel |
| Hose outlet thread | 1 1/2" NPT(M) for 1 1/2" ID Hoses |
| Wetted Materials | Steel, nickel plated steel, Nitrile rubber, nickel plated aluminum |
| Service Bulletin | SB 2038 |

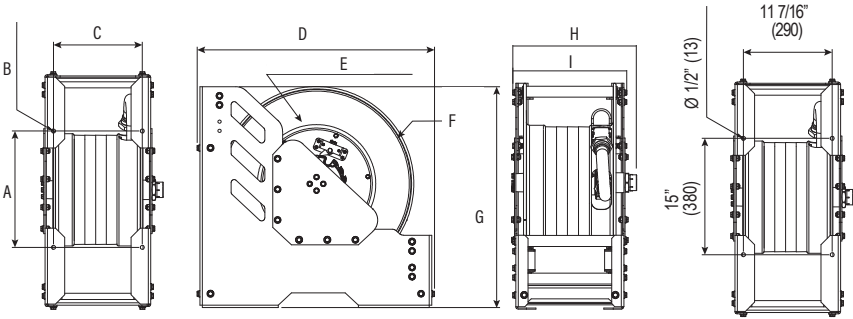

| Dimensions inches (MM) | | | | | | | | |
|------------------------|-----------------|--------------------|-------------------|--------------------|-----------------|--------------------|-------------------|--------------------|
| A | B | C | D | E | F | G | H | I |
| 15" (381 mm) | 0.5" (13 mm) | 11.43" (291 mm) | 30.5" (775 mm) | 14.37" (365 mm) | 25" (635 mm) | 28.25" (718 mm) | 15.5" (394 mm) | 14.25" (362 mm) |

